

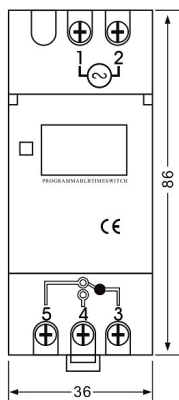


Drakko Ω

INTERRUPTOR HORARIO DIGITAL 20A

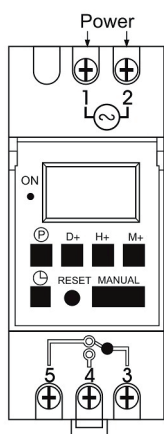

ESPAÑOL

No. Producto	DHC20A
Tensión de funcionamiento	AC 220V 50-60Hz
Limite de voltaje	$\pm 10\%$
Histéresis	$\leq 2\text{seg}/\text{dia}$ (25°C)
Operación de On/Off	16 On & 16 Off, 18 tiempo de pulso
Consumo de energía	7.5 VA (max)
Monitor	LCD
Vida de servicio	Mecanicamente 10 - Electricamente 10
Intervalo mínimo	1 minuto
Peso	aprox 150g
Cuenta regresiva	1 seg - 99 min 59 seg
Pulso	1 seg - 59 min 59 seg
Capacidad de carga	Carga resistiva: 20A/250VAC Carga para lámpara: 2500W
Contacto de conmutación	1 conmutador
Reserva de poder	3 años (batería de litio)
Temperatura ambiente	-10°C ~ +40°C
Humedad del ambiente	35~85%RH
Instalación	DIN rail

INGLÉS

ItemNo.	DHC20A
Operating Voltage	AC 220V 50-60Hz
Voltage limit	$\pm 10\%$
Hysteresis	$\leq 2\text{sec}/\text{day}$ (25°C)
On/Off operation	16 On & 16 Off, 18 times pulse
Power consumption	7.5 VA (max)
Display	LCD
Service life	Mechancally 10 - Electrically 10
Minimum interval	1 minute
Wight	aprox 150g
Count down	1 sec - 99 min 59 sec
Pulse	1 sec - 59 min 59 sec
Load capacity	Resistive load: 20A/250VAC Lamp Load: 2500W
Switching contact	1 changeover switch
Power reserve	3 years (lithium battery)
Ambient temperature	-10°C ~ +40°C
Ambient humidity	35~85%RH
Installation	DIN rail